


Kits for Fusible disconnect switches

30A – 800A, 600V, 3 pole^①

UL fuse class J, CC, T, L

Each kit includes:

- 1 three pole switch
- 1 handle
- 1 shaft
- 1 terminal lug kit

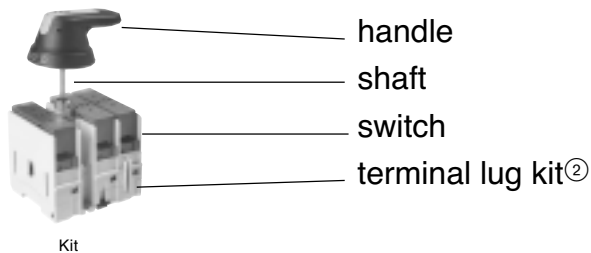

Kits with selector handles

| UL general purpose amp rating | UL Fuse type 600V | Maximum horsepower rating | | | | | Kit catalog number | List price |
|-------------------------------|-------------------|---------------------------|------|------|------|------|--------------------|------------|
| | | Three phase | | | | | | |
| | | 200V | 208V | 240V | 480V | 600V | | |
| 30 | J | 5 | 7.5 | 7.5 | 15 | 20 | OSJ30B2A1-180 | \$ 314 |
| 30 | CC | 5 | 7.5 | 7.5 | 15 | 20 | OSC30B2A1-180 | 314 |

Kits with pistol handles

| UL general purpose amp rating | UL Fuse type 600V | Maximum horsepower rating | | | | | Kit catalog number | List price |
|-------------------------------|-------------------|---------------------------|------|------|------|------|--------------------|------------|
| | | Three phase | | | | | | |
| | | 200V | 208V | 240V | 480V | 600V | | |
| 30 | J | 5 | 7.5 | 7.5 | 15 | 20 | OSJ30B6-150 | \$ 374 |
| 30 | CC | 5 | 7.5 | 7.5 | 15 | 20 | OSC30B6-150 | 374 |
| 60 | J | 15 | 15 | 15 | 30 | 50 | OSJ60B6-150 | 472 |
| 100 | J ^② | 25 | 25 | 30 | 60 | 75 | OSJ100B8-150 | 646 |
| 200 | J ^③ | 50 | 50 | 60 | 125 | 150 | OSJ200B4-280 | 1586 |
| 400 | J ^③ | 100 | 125 | 125 | 250 | 350 | OSJ400B4-280 | 2176 |
| 600 | J ^③ | 150 | 150 | 200 | 400 | 500 | OSJ600B4-280 | 3406 |
| 800 | L | 200 | 200 | 250 | 500 | 600 | OSL800B4-280 | 5266 |

Components for kits with selector handles

| Kit catalog number | Switch | | Handle ^④ | | | | Shaft | | | Terminal lugs | | |
|--------------------|----------------|-----------|---------------------|--------------|-----------------------|--------------------------------------|--------------------|----------------------|-----------|---------------|----------------|--|
| | Catalog number | NEMA type | Marking | De-feat-able | Handle catalog number | Mounting depth ^⑤ (inches) | Length (inches/mm) | Shaft catalog number | Wire size | Wire type | Catalog number | |
| OSJ30B2A1-180 | OS30AJ12 | 1, 3R, 12 | I/O & Off/On | — | OHB2AJ1 | 6.3 - 9.5 | 7.1/180 | OXS5X180 | #18 - 8 | Cu | Integral | |
| OSC30B2A1-180 | OS30ACC12 | 1, 3R, 12 | I/O & Off/On | — | OHB2AJ1 | 6.3 - 9.5 | 7.1/180 | OXS5X180 | #18 - 8 | Cu | Integral | |

Components for kits with pistol handles

| Kit catalog number | Switch | | Handle ^④ | | | | Shaft | | | Terminal lugs | | |
|--------------------|----------------|-----------|---------------------|--------------|-----------------------|--------------------------------------|--------------------|----------------------|-------------------|---------------|----------------|--|
| | Catalog number | NEMA type | Marking | De-feat-able | Handle catalog number | Mounting depth ^⑤ (inches) | Length (inches/mm) | Shaft catalog number | Wire size | Wire type | Catalog number | |
| OSJ30B6-150 | OS30AJ12 | 1, 3R, 12 | I/O & Off/On | Yes | OHB65J5 | 5.3 - 8.3 | 5.9/150 | OX5X150 | #18 - 8 | Cu | Integral | |
| OSC30B6-150 | OS30ACC12 | 1, 3R, 12 | I/O & Off/On | Yes | OHB65J5 | 5.3 - 8.3 | 5.9/150 | OX5X150 | #18 - 8 | Cu | Integral | |
| OSJ60B6-150 | OS60J12 | 1, 3R, 12 | I/O & Off/On | Yes | OHB65J6 | 5.5 - 8.5 | 5.9/150 | OX6X150 | #14 - 4 | Cu | Integral | |
| OSJ100B6-150 | OS100J03 | 1, 3R, 12 | I/O & Off/On | Yes | OHB80J6 | 5.5 - 8.5 | 5.9/150 | OX6X150 | #14 - 2/0 | Cu/Al | OZXA-24 | |
| OSJ200B4-280 | OES200J3 | 1, 3R, 12 | I/O & Off/On | Yes | OHB145J12 | 7.9 - 12.2 | 8.7/220 | OX12X280 | #6 - 300kcmil | Cu/Al | OZXA-25 | |
| OSJ400B4-280 | OES400J3 | 1, 3R, 12 | I/O & Off/On | Yes | OHB145J12 | 7.9 - 12.2 | 8.7/220 | OX12X280 | #2 - 600kcmil | Cu/Al | OZXA-26 | |
| OSJ600B4-280 | OES600J3 | 1, 3R, 12 | I/O & Off/On | Yes | OHB145J12 | 11.2 - 14.0 | 11.0/280 | OX12X280 | (2) #2 - 600kcmil | Cu/Al | OZXA-27 | |
| OSL800B4-280 | OES800J3 | 1, 3R, 12 | I/O & Off/On | Yes | OHB145J12 | 11.2 - 14.0 | 11.0/280 | OX12X280 | (2) #2 - 600kcmil | Cu/Al | OZXA-27 | |

If other handles or shafts are desired, please order from the individual component pages 2.11 – 2.28.

① Other pole configurations available. Please see the individual component pages.

② 30A and 60-A fusible switches include standard integral terminal lugs.

③ J type fuse clips are standard. If 600V Type "T" fuse clips are desired, please select a fuse adapter kit from the individual component pages.

④ All handles are black and accept three padlocks. For others, please see the individual component pages.

⑤ Mounting depth is the distance from the outside of the door to the disconnect switch mounting plate. Shaft can be cut to desired length.